

S3219E

ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lift
- Compact & nimble
- Drives through a standard doorway
- Suitable for indoor and outdoor use
- Easy to use & maintain

snorkel
www.snorkellifts.com

ELECTRIC SLAB SCISSOR LIFTS


S3219E

DIMENSIONS	S3219E
Max. working height	7.79m
Max. platform height (A)	5.79m
Platform size (stowed)	1.61m x 0.71m
Platform size (extended)	2.53m x 0.71m
Deck extension length	0.91m
Overall length (C)	1.79m
Overall width (D)	0.81m
Stowed height (B)	2.09m
Min. height (guardrails folded)	1.65m
Ground clearance (stowed)	66mm
Ground clearance (elevated)	19mm

PERFORMANCE	
Platform capacity (SWL)	250kg
Max. drive height	5.79m
Max. wind speed	12.5m/s
Max. drive speed (stowed)	3.2km/h
Max. drive speed (elevated)	0.6km/k
Gradeability	25%
Inside turning radius	0.1m
Outside turning radius	1.63m
Tires	non-marking solid rubber
Controls	proportional
Drive system	2 wheel drive

POWER	
Power source	4 x 6V 220amp hour batteries
Charger	90 - 240V, 25amp

WEIGHT	
Weight	1,564kg

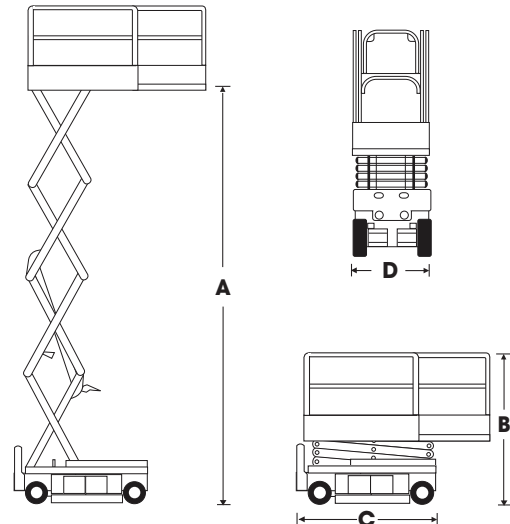


STANDARD FEATURES

- Roll-out deck extension with locking handles
- Non-marking tyres
- Swing-out service trays
- Saloon door entry
- Key switch
- 2 persons + equipment capacity indoors
- 1 person + equipment capacity outdoors
- Proportional controls
- Power line to platform
- Hour meter & onboard diagnostics display
- Dual lanyard attachments points
- Flashing amber light
- CE approved

OPTIONS

- Special paint colours
- Environmental (green) oil

TURNING RADIUS

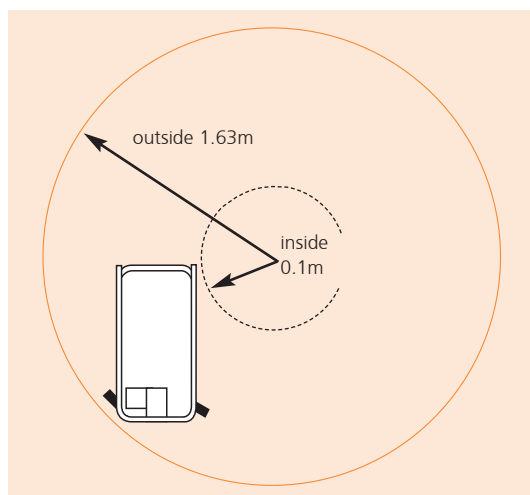

snorkel www.snorkellifts.com

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057
e: sales@snorkellifts.com

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance. 04/2015